


H2400

Standing Flower Tower

Specifications

(mm)

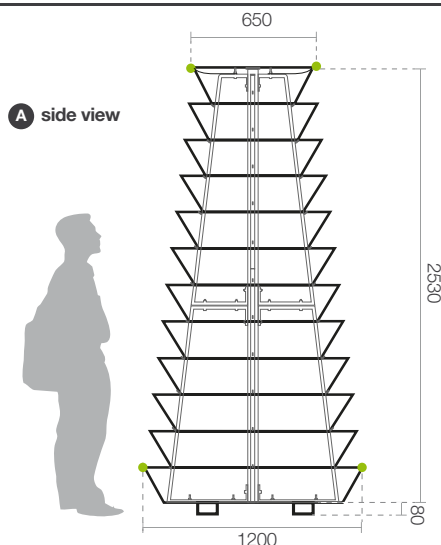

Beware of imitations!

It is impossible to copy quality and safety. Only products branded with Terra's sign can provide the highest quality, safety and accuracy of execution.

Product protected
by patent

✓ P 379058

Registered design

✓ Wp 9324-25



Made in EU



Warranty 36 months

Number of rings	12
Capacity	1335 liters
Total height	2610 mm
Base diameter	1200 mm

Weight before planting	147 kg
Weight after planting	710 - 1300 kg
Estimated amount of seedlings	145 - 180 pieces
Warranty	36 months

⚙️ Weight depending on the type of soil and its moisture

Terra Cascading Flower Towers include a 3-year warranty program called "DOOR TO DOOR". In practice it is an extensive system of support and technical assistance, as well as an extremely efficient service guarantee. Product's flaws will promptly be fixed by our service team in any place designated or new products will be delivered.

Colours (DUPLEX)



DUPLEX System

The combination of a galvanized layer and a polyester powder coat gives an extraordinary resistance. The top coat of paint, which supposed to be a decoration, becomes an additional anticorrosive layer.

Production method

- laser-cut rings
- rings welded in MAG / TIG technology
- all the elements are hot dip zinc coated
- powder coated rings (DUPLEX system)

Safety


- rubber gasket on each ring
- no sharp edges
- heavy and stable
- high resistance to vandalism
- can be fixed to the ground




H2400

Standing Flower Tower

Transport
(mm)

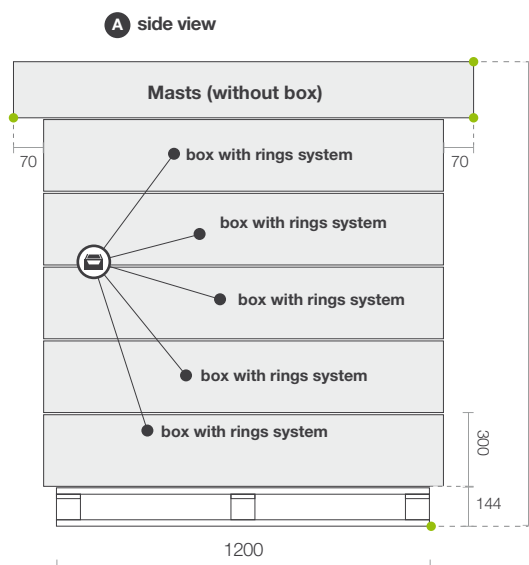

 2 SETS PACKED IN A BOX

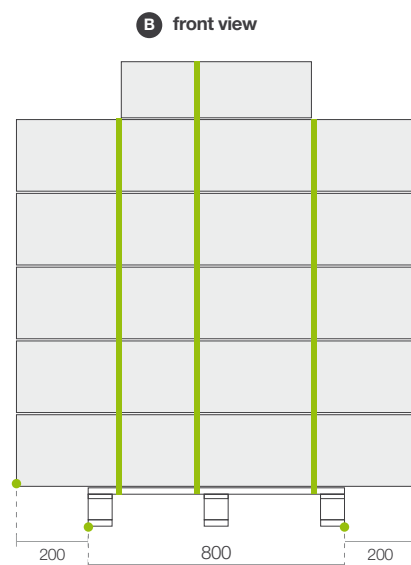



UP TO **5** SETS FOR A EURO PALLET

Set contents

Lower pan with legs	1 item	Mast (profile 50x50 mm)	1 item
Rings	11 items	Mast (profil 60x60 mm)	1 item
Screw 10x50	18 items	Upper span	4 items
Screw 10x90	8 items	Lower span	4 items
Gasket	38 m	Protective flat bar	2 items
Glue for the gasket	4 items		


Additional accessories

 anti-theft system



 watering system

TerraClick Tif



number of lines in the system: 6
type of connector: GEKA
flow of drippers: 2 – 3 l/h
pressure: 0,5 - 4 atm
opening pressure of the anti-drip: 0,4 atm
closing pressure of the anti-drip: 0,2 atm
hose type: **new generation**
resistant to chemicals
and acidification

Copyright © 2013 Terra. All rights reserved.

